



Rose Township Trustees

2044 Magnolia Rd.

Magnolia, Ohio 44643

(330) 866-9303

Check # _____

Driveway Permit for Construction Within the Township Right-of-Way Limits (\$50)

Temporary _____ Permanent _____

Applicant: _____

Contractor: _____

Address: _____

Address: _____

Phone: _____

Phone: _____

Email: _____

Location: Township: ROSE Road: _____ House Number: _____

Driveway Standards


1. Site Distance: Driveways, or approaches, should be located and designed to enable vehicles traveling at or near legal road speeds to see a driveway or approach. Conversely, the driveway, or approach, should be placed in areas to allow vehicles, while within the approach area, to observe the though roadway for a distance sufficient to make a safe entry onto the roadway. The lengths adequate to accomplish the above vary with each installation and depend on the horizontal and vertical alignment of the roadway, speeds along the roadway and the location of existing objects, such as trees, signs, buildings, etc., which may restrict visibility along the roadway.

The recommended sight distance shall be the Intersection Sight Distance (ISD) shown in the latest edition of the Ohio Department of Transportation (ODOT) "Location and Design Manual", corresponding to the legal speed of the roadway or design speed as determined by the Engineer. If this recommended sight distance cannot reasonably be met, the minimum sight distance shall be the Stopping Sight Distance (SSD) shown in the latest edition of the ODOT "Location and Design Manual", corresponding to the legal speed of the roadway of design speed as determined by the Engineer.

2. The Rose Township Trustees will determine if a drive culvert is required. If a drive culvert is required, the Rose Township Trustees will determine the type, size and length of the culvert. The minimum culvert size permitted is 12 inches in diameter and 20 feet in length. New driveway culverts shall be tied into the existing ditch line.

3. Driveways shall be constructed so that they will not permit water or stone to run onto the road pavement. Crowning of the driveway outside of the road berm area is suggested. All commercial driveways constructed on a smooth surface road, shall have a minimum 25 ft. asphalt apron. See the detailed sketch below.
4. The Rose Township office must be contacted 24 hours prior to starting the installation and again upon completion in order for a final inspection of the driveway. Failure to notify the Rose Township office prior to and again upon completion will void this permit.
5. No machinery, vehicles or material are to be stored on the roadway at any time.
6. Do not place any dirt or stone on the traveled portion of the roadway.
7. The existing roadside drainage is to remain undisturbed.
8. The permittee assumes all responsibility for the cleaning and maintenance of the drainage installation authorized.
9. The site is to be cleaned and restored to its original or better condition when work is completed.
10. All excess and discarded material is to be removed from the township right-of-way.
11. Any expense incurred by the township due to the applicant's use of the right-of-way will be paid by the applicant.
12. Permit must be on job site at all times.
13. Permittee shall hold the Rose Township Trustees, agents and employees harmless from any and all claims or damage, public or private, arising from or growing out of the placement, construction, or use of the excavation subject to the issuance of this permit.

Detailed Sketch

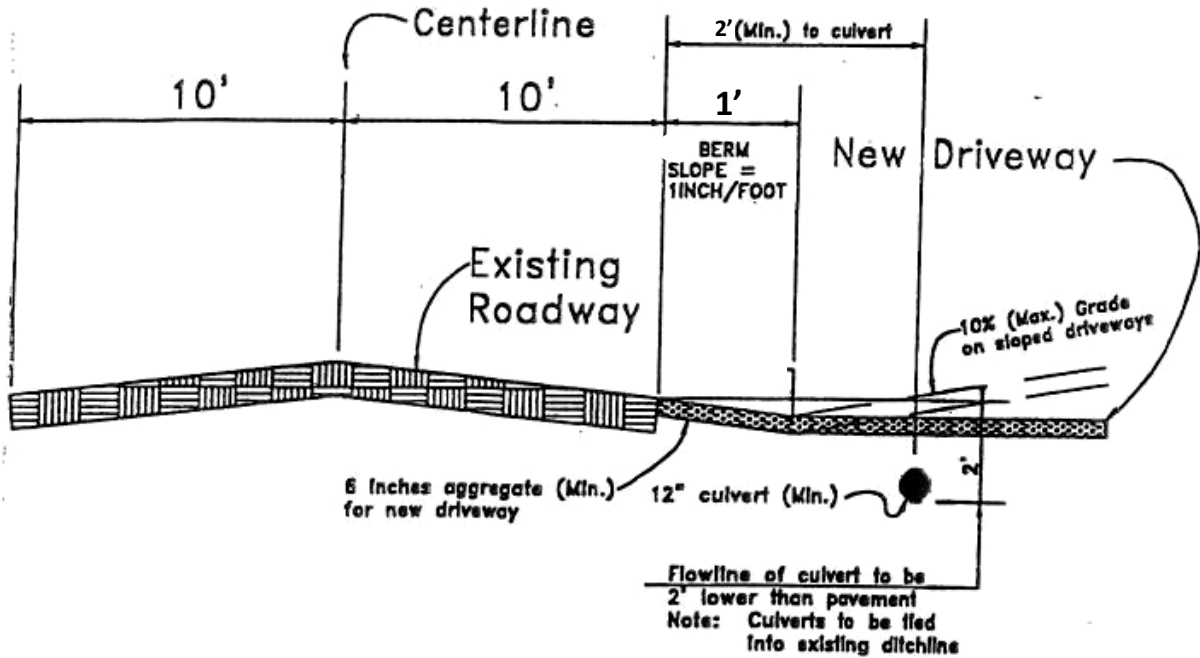

As the applicant of this permit, I have read and agree to comply with the Driveway Standards and Detailed Sketch of this permit.

Applicant Signature: _____ Date: _____

Rose Township Trustees: _____ Date: _____

_____ Date: _____

_____ Date: _____

Final installation approved by the trustees: Yes _____ No _____ Date _____